


NOTES:

1.MATERIAL:

1.1,HOUSING: Thermoplastic UL94V-0,BLACK

1.2,CONTACT:COPPER ALLOY Au PLATED OVER NICKEL PLATED

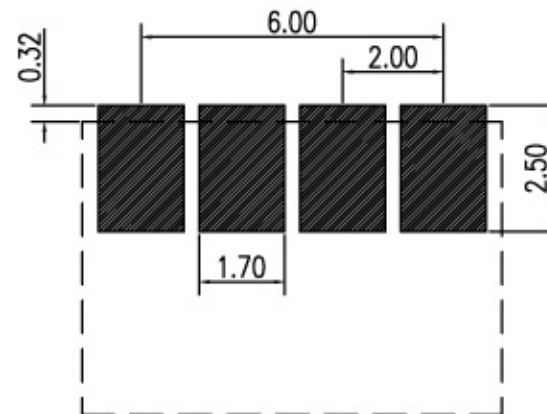

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

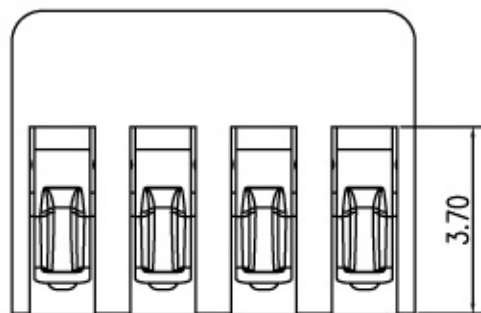


TABLE A :

2	端子	4	Thermoplastic UL94V-0, BLACK	/
1	胶芯	1	COPPER ALLOY Au PLATED OVER NICKEL PLATED	
项目	名称	数量/套	MATERIAL/FINISHED	REMARK

UNITS: mm		CSCONN		SHENZHEN CSCONN PRECISE ELECTRONICS CO.,LTD			
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:			
X. ° ±5°	0. X±0.3	CBA-200481-165		BATTERY 4P 2.0MM H=1.65MM			
X. 1 ±2°	0. XX±0.2	APPD:		DWG NO. BATTERY			
XX. ±1°	0. XXX±0.1	CHKD: Skila			SCALE	SHEET	REV
XXX. ±0.5°		DR: Kitty			1:1	1 OF 1	A