
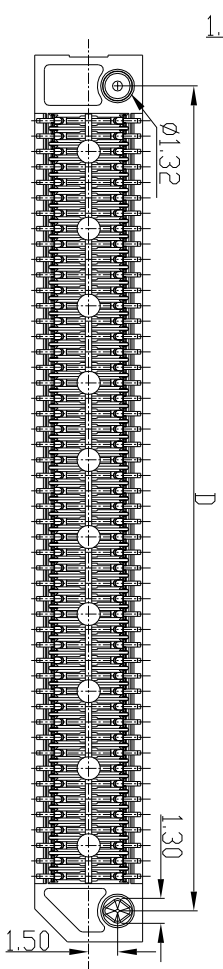



- SPECIFICATIONS
1. CURRENT RATING: 1.0A .
 2. VOLTAGE RATING: 300VAC.
 3. OPERATING TEMPERATURE RANGE: -55°C TO +125°C
 4. OPERATING HUMIDITY RANGE: 90% TO 95%.
 5. WITHSTANDING VOLTAGE: 500 VAC
 6. PART NO. DESCRIPTION:
CBT-0830XXF-XX

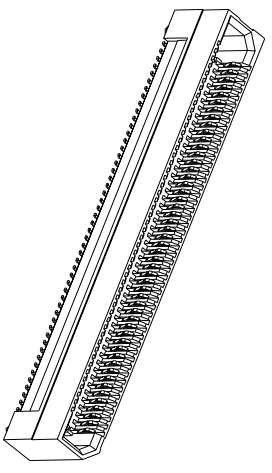

HEIGHT	H
5.00	5.10
7.00	7.00
9.00	9.00

MATED HEIGHT		
FEMALE HEIGHT	MALE HEIGHT	MATED HEIGHT
2.00	5.00	8.00
5.00	7.00	10.00
7.00	9.00	12.00
9.00	11.00	14.00
	13.00	16.00
	15.00	18.00
	17.00	19.00

POSITION	A	B	C	D
10	10.00	8.32	3.20	6.80
20	14.00	12.32	7.20	10.80
22	14.80	13.12	8.00	11.60
24	15.60	13.92	8.80	12.40
26	16.40	14.72	9.60	13.20
30	18.00	16.32	11.20	14.80
40	22.00	20.32	15.20	18.80
50	26.00	24.32	19.20	22.80
60	30.00	28.32	23.20	26.80
80	38.00	36.32	31.20	34.80
100	46.00	44.32	39.20	42.80
120	54.00	52.32	47.20	50.80
140	62.00	60.32	55.20	58.80
150	66.00	64.32	59.20	62.80
200	86.00	84.32	79.20	82.00

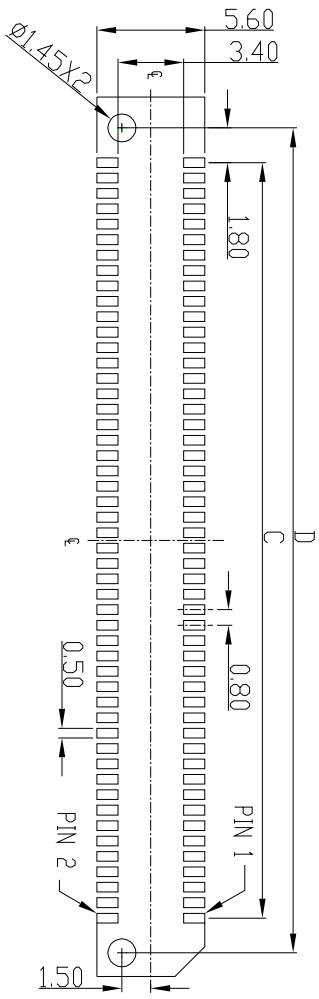

Recommended PC board pattern
(TOP VIEW)

UNITS: mm	
GENERAL TOLERANCE	
X. ±0.5°	0.X±0.3
X.1±2°	0.X±0.2
X. ±1°	0.XX±0.1
XXX. ±0.5°	

CSCONN
PART NO.(INTENDED USE)
CBT-0830XXF-XX

TITLE:
BTB 0.8mm XP FEMALE(台高7.0-18.0MM)

DWG NO. BTB
SCALE 1:1
SHEET 1 OF 1
REV A

CSCONN PRECISE ELECTRONICS CO.,LTD

