


SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

PCB LAYOUT

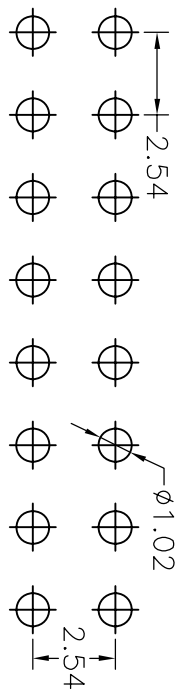

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO.(INTENDED USE)		TITLE:	
X. ° ±5°	0. X ±0.25	CFH25485X01004		FH 2.54MM XP DIP90 双排插,高8.5mm	
APPD:		CHKD:		DWG NO.	
X. 1 ±2°		0. XX ±0.2		PH	
XX. ±1°		0. XXX ±0.1		SCALE	
DR:		Kitty		1:1	
				SHEET	
				1 OF 1	
				REV	
				A	