

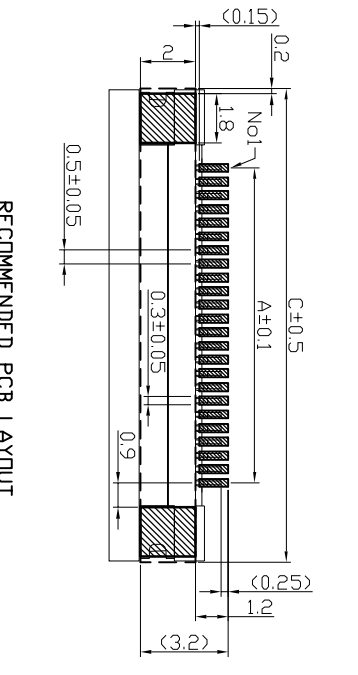

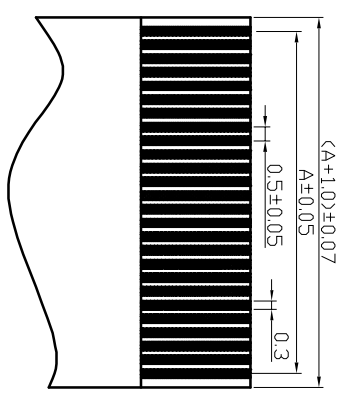


CFP-0512XX-WT

CFP-0512XS-WT



RECOMMENDED PCB LAYOUT

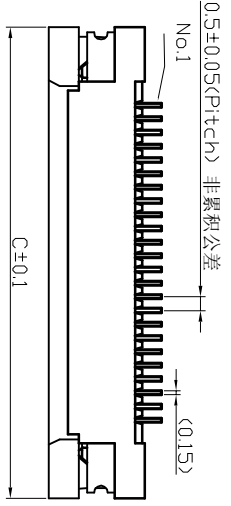

SPECIFICATION

1. Material:
 Housing: HIGH-TEMP Plastic, UL94V-0, color: Natural.
 Lock: HIGH-TEMP Plastic, UL94V-0, color: black.
 Contacts: Copper alloy.
 Solder tab: Copper alloy.

2. Electrical Characteristics:
 Current rating: 0.5A(max).
 Voltage rating: 50V(max).
 Operating Temperature: -25°C~+85°C.
 Insulation resistance: 500M ohms min. at 500V DC
 Dielectric withstanding voltage: 500V AC/minute.
 Contact resistance: 30m ohms max.

Pin位	A	B	C	Pin位	A	B	C
4	1.5	2.56	7.3	21	10	11.06	15.8
5	2	3.06	7.8	22	10.5	11.56	16.3
6	2.5	3.56	8.3	23	11	12.06	16.8
7	3	4.06	8.8	24	11.5	12.56	17.3
8	3.5	4.56	9.3	25	12	13.06	17.8
9	4	5.06	9.8	26	12.5	13.56	18.3
10	4.5	5.56	10.3	27	13	14.06	18.8
11	5	6.06	10.8	28	13.5	14.56	19.3
12	5.5	6.56	11.3	29	14	15.06	19.8
13	6	7.06	11.8	30	14.5	15.56	20.3
14	6.5	7.56	12.3	31	15	16.06	20.8
15	7	8.06	12.8	32	15.5	16.56	21.3
16	7.5	8.56	13.3	33	16	17.06	21.8
17	8	9.06	13.8	34	16.5	17.56	22.3
18	8.5	9.56	14.3	35	17	18.06	22.8
19	9	10.06	14.8	36	17.5	18.56	23.3
20	9.5	10.56	15.3				

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD			
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE: FPC 0.5MM XP H=1.2MM 贴片			
X. ±5°	0.X±0.25	CFP-0512XX/S-WT		DWG NO. FPC			
X.1±2°	0.XX±0.2	APPD:		SCALE SHEET			
XX ±1°	0.XXX±0.1	CHKD: Skila		1:1 1 OF 1			
		DR: Kitty		REV A			

APPLICABLE FPC