


Pin 位	A	B	C	Pin 位	A	B	C
4	3	5.06	6	24	23	25.06	26
5	4	6.06	7	25	24	26.06	27
6	5	7.06	8	26	25	27.06	28
7	6	8.06	9	27	26	28.06	29
8	7	9.06	10	28	27	29.06	30
9	8	10.06	11	29	28	30.06	31
10	9	11.06	12	30	29	31.06	32
11	10	12.06	13	31	30	32.06	33
12	11	13.06	14	32	31	33.06	34
13	12	14.06	15	33	32	34.06	35
14	13	15.06	16	34	33	35.06	36
15	14	16.06	17	35	34	36.06	37
16	15	17.06	18	36	35	37.06	38
17	16	18.06	19	37	36	38.06	39
18	17	19.06	20	38	37	39.06	40
19	18	20.06	21	39	38	40.06	41
20	19	21.06	22	40	39	41.06	42
21	20	22.06	23				
22	21	23.06	24				
23	22	24.06	25				

SPECIFICATION

1. Material:
Housing: HIGH-TEMP Plastic, UL94V-0,color: Natural.
Lock: HIGH-TEMP Plastic, UL94V-0,color: Black.
Contacts: Copper alloy.
2. Electrical Characteristics:
Current rating: 0.5A(max).
Voltage rating: 50V(max).
Operating Temperature: -25°C~+85°C.
Insulation resistance: 500M ohms min. at 500V DC
Dielectric withstanding voltage: 500V AC/minute.
Contact resistance: 30m ohms max.

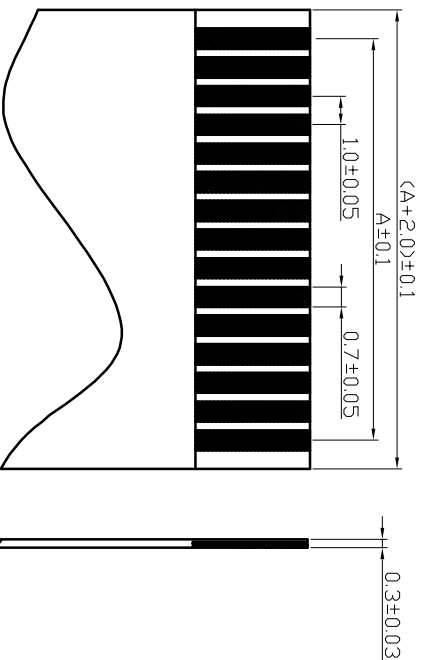

APPLICABLE FPC

UNITS: mm		CSCONN		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE		PART NO. (INTENDED USE)		TITLE:	
X. ° ±5°	0. X ±0.25	CFP102802XX002		FPC 1.0MM XP DIP180 无锁正脚位	
X. 1 ±2°	0. XX ±0.2	APPD:		DWG NO. FPC	
XX. ±1°	0. XXX ±0.1	CHKD: Skilla		SCALE SHEET	
		DR: Kitty		1:1 1 OF 1	
				REV	
				A	