


**SPECIFICATION**

1. Material: HIGH-TEMP Plastic, UL94V-0, color: Natural.  
 Housing: HIGH-TEMP Plastic, UL94V-0, color: Natural.  
 Contacts: Copper alloy.  
 Solder tab: Copper alloy.  
 2. Electrical Characteristics:  
 Current rating: 1A(max).  
 Voltage rating: 200V(max).  
 Operating Temperature: -25°C~+85°C.  
 Insulation resistance: 1000M ohms min. at 1000V DC  
 Dielectric withstanding voltage: 1000V AC/minute.  
 Contact resistance: 30m ohms max.

Pin#	A	B	C
2	1.25	7.65	
3	2.5	8.9	
4	3.75	10.15	2.5
5	5	11.4	3.75
6	6.25	12.65	5
7	7.5	13.9	6.25
8	8.75	15.15	7.5
9	10	16.4	8.75
10	11.25	17.65	10
11	12.5	18.9	11.25
12	13.75	20.15	12.5
13	15	21.4	13.75
14	16.25	22.65	15
15	17.5	23.9	16.25
16	18.75	25.15	17.5
17	20	26.4	18.75
18	21.25	27.65	20
19	22.5	28.9	21.25
20	23.75	30.15	22.5
21	25	31.4	23.75
22	26.25	32.65	25
23	27.5	33.9	26.25
24	28.75	35.15	27.5
25	30	36.4	28.75
26	31.25	37.65	30
27	32.5	38.9	31.25
28	33.75	40.15	32.5
29	35	41.4	33.75
30	36.25	42.65	35

**PCB Layout**

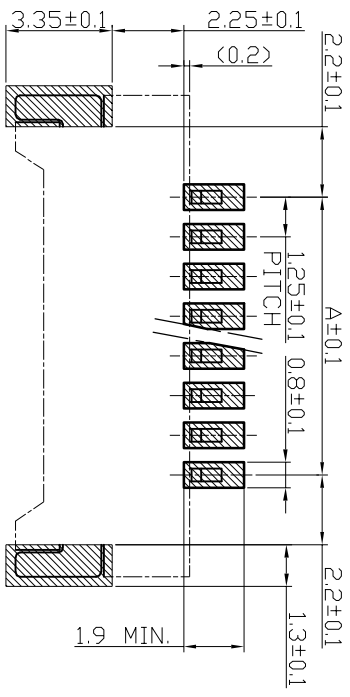

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO.,LTD	
GENERAL TOLERANCE					
X. ° ±5°	0. X ±0.25	PART NO. (INTENDED USE)		TITLE:	
X. 1 ±2°	0. XX ±0.2	CWF125185XX001		WAFER 1.25MM XP SMT H=1.85MM	
APPD:		CHKD: Skila		DWG NO. WAFER	
XX. ±1°		DR: Kitty		SCALE SHEET REV	
				1:1 1 OF 1 A	